


DIMENSIONS – TECHNICAL DATA SHEET

HYDRAULIC LIFT LINK - 50/30min.480 fi 22/22

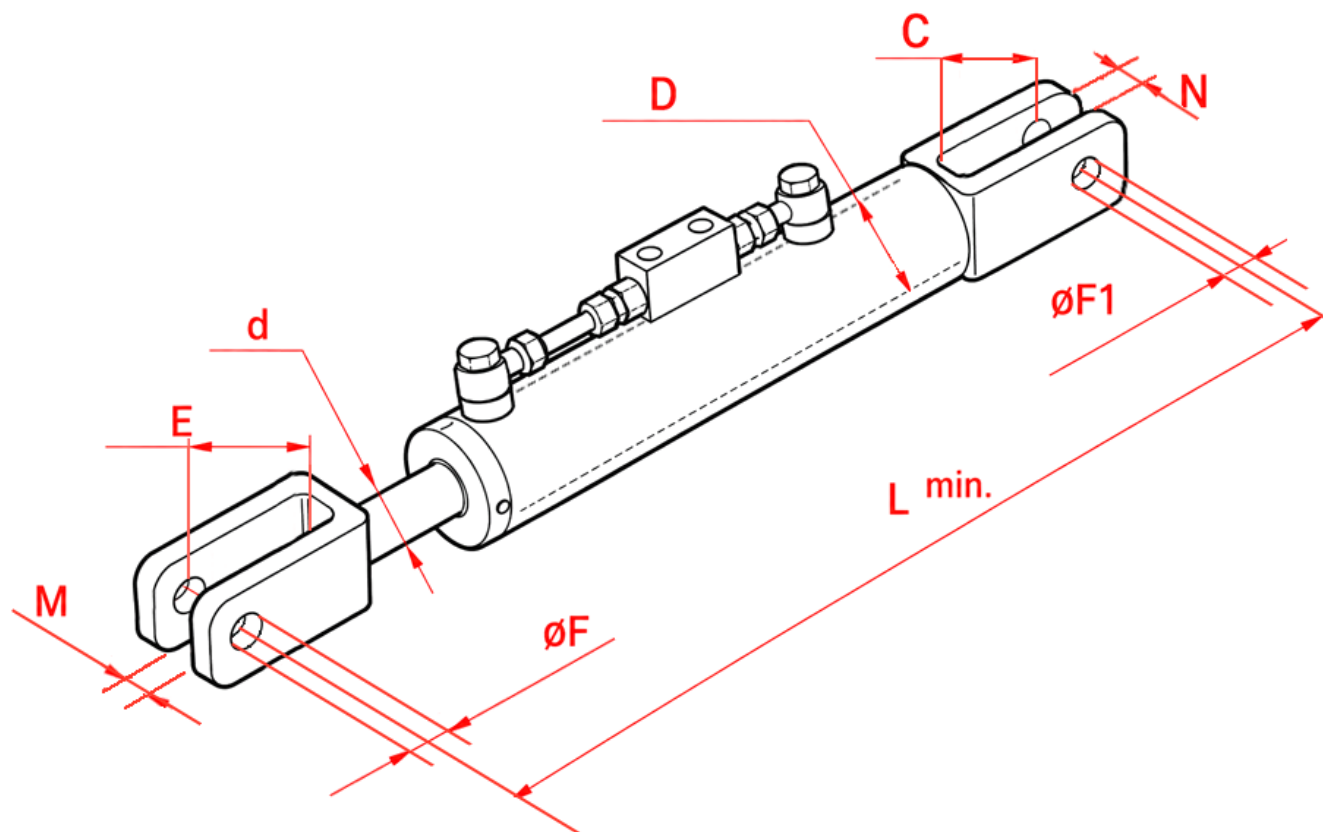

Internal fork width "N":	38 mm
Internal fork width "M":	26 mm
Distance between cylinder bottom and hole center "C":	59 mm
Distance between inside of fork and center of hole "E":	98 mm
Rod diameter "d":	30 mm
Maximum pressure:	250 bar
Block valve:	yes
Product weight:	7.43 kg
Cylinder internal diameter "D":	50 mm
Cylinder extension force (at 180 bar):	3.53 ton
Cylinder retraction force (at 180 bar):	2.26 ton
Rod hole diameter "F":	22 mm
Minimum length "Lmin":	480 mm
Cylinder hole diameter "F1":	22 mm
Cylinder stroke:	160 mm
Protection:	painted (black)

Code	Tractor Brand	Model
11663	FIAT-NEW HOLLAND	TK compatto

