


DIMENSIONS – TECHNICAL DATA SHEET

HYDRAULIC LIFT LINK - 80/40min.560 fi 22/22

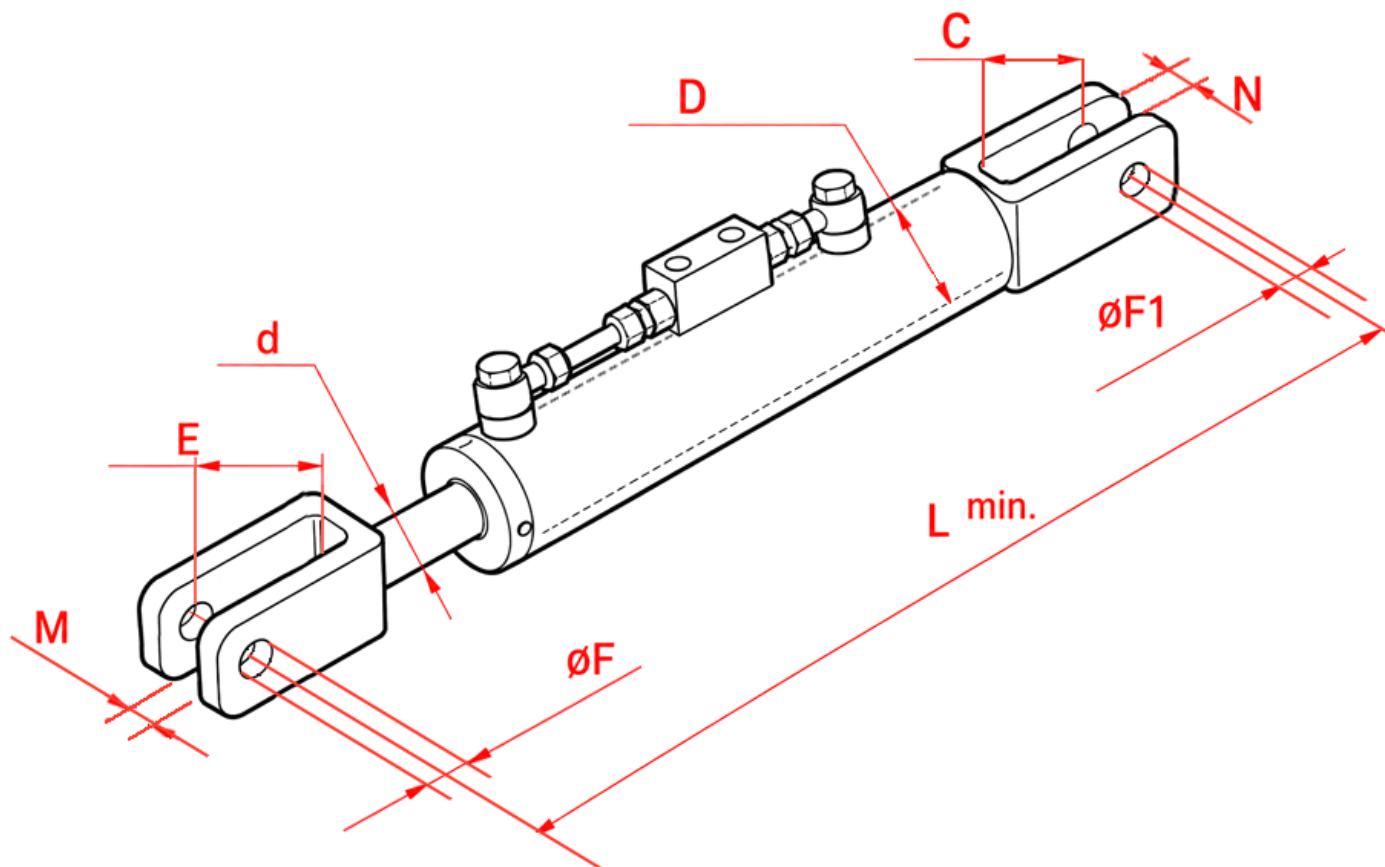

Internal fork width "N":	52 mm
Internal fork width "M":	61 mm
Distance between cylinder bottom and hole center "C":	60 mm
Distance between inside of fork and center of hole "E":	103 mm
Rod diameter "d":	40 mm
Maximum pressure:	250 bar
Block valve:	yes
Product weight:	14.1 kg
Cylinder internal diameter "D":	80 mm
Cylinder extension force (at 180 bar):	9.04 ton
Cylinder retraction force (at 180 bar):	6.78 ton
Rod hole diameter "F":	22 mm
Minimum length "Lmin":	560 mm
Cylinder hole diameter "F1":	22 mm
Cylinder stroke:	180 mm
Protection:	painted (black)

Code	Tractor Brand	Model
11644	FENDT	308 S - Impieghi vari

